


Dati generali / General data

Flow rate	2 m³/min	Working pressure	20 bar
Separation Efficiency	< 3 ppm	Collapse pressure filter	5 bar
Pressure drop	0,2 bar (7 bar & 2 m³/min)	Burst pressure	35 bar
Gasket	VITON	Pre-separation fleece	
Flow direction	Out-In		
Media	Fibre di vetro (Borosilicato)/Glass fiber (borosilicate)		

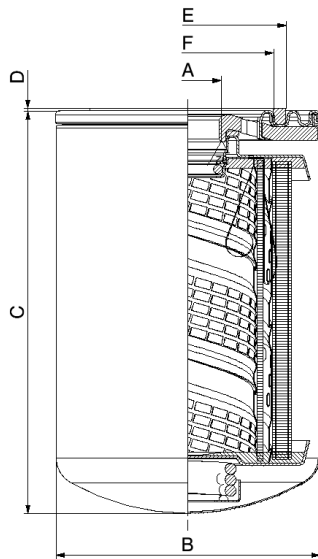

Dati tecnici / Technical data

A	M24X1,5
B	96
C	210
D	1
E	71
F	62