


Dati generali / General data

Flow rate	5,5 m³/min	Working pressure	20 bar
Separation Efficiency	< 3 ppm	Collapse pressure filter	5 bar
Pressure drop	0,2 bar (7 bar & 5,5 m³/min)	Burst pressure	23 bar
Gasket	VITON	Pre-separation fleece	
Flow direction	Out-In		
Media	Fibre di vetro (Borosilicato)/Glass fiber (borosilicate)		

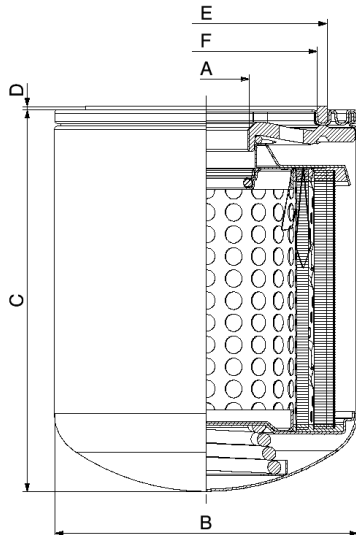

Dati tecnici / Technical data

A	1"1/2-16 UN
B	137
C	305
D	1,5
E	109,5
F	100,5